




DISPLAY FIREWORK SKELETON SETPIECE

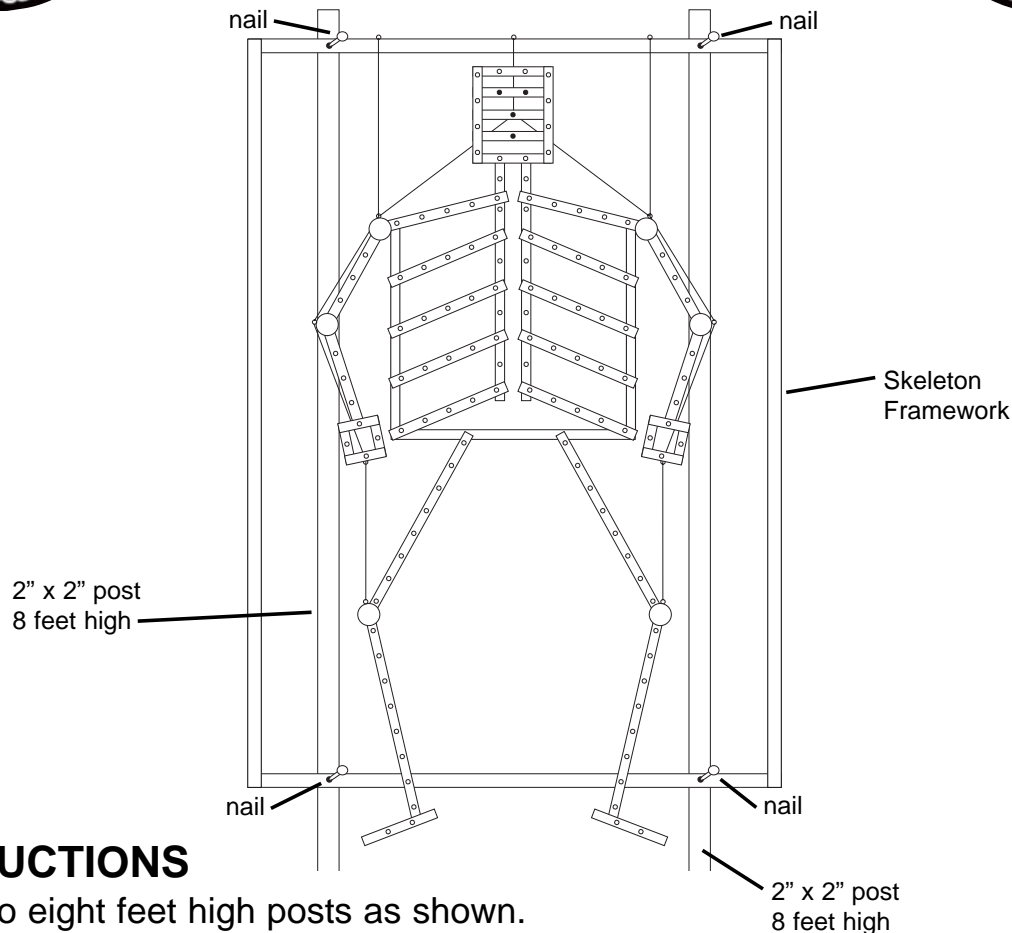

INSTRUCTIONS

Erect two eight feet high posts as shown.

Carefully remove the skeleton from the case.

Stand the skeleton up against the two posts and carefully disentangle the operating strings. All strings should run smoothly through metal eyes. Lay the strings out behind ready for operating. Do not pull the strings to operate until after you have lit the fuse.

Nail or cable tie the framework to the posts taking care that strings can still operate smoothly.

Remove fuse cover and light tip of fuse with portfire held at arms length.

Wait until setpiece is fully lit before operating. You will be able to move arms, legs and head by pulling on strings.

WARNINGS

SPECTATORS MUST BE AT LEAST 25 METRES AWAY.

EMITS SHOWERS OF SPARKS.

FIREWORKS INTERNATIONAL, DERBY, DE65 6EJ

Complies with BS7114 Part 2 1988